


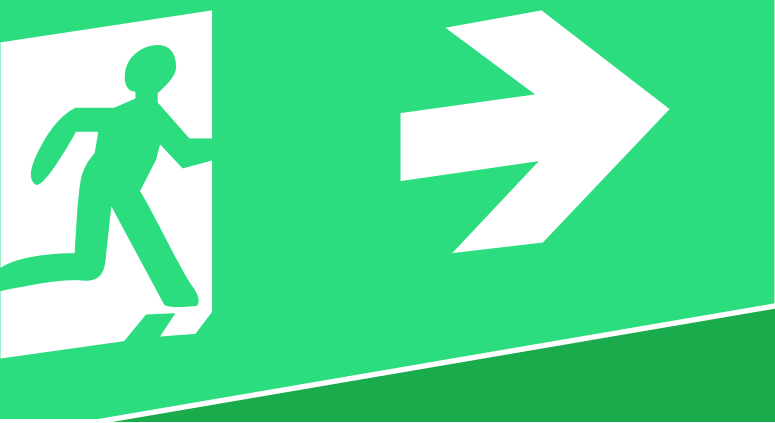

DELTA V1

(Exit Sign)

IP20

30m

▽



CE



Standard Feature

- Compact and decorative design
- Polycarbonate housing
- Quick connection and Easy installation
- Bright SMD 3528 LED lamp
- Input Voltage: 220 - 240VAC 50Hz
- Ni-Cad battery
- Maintained or ACEM for 1 hour or 3 hours
- Viewing angle: 30 M
- IP 20, ROHS compliant
- Options: Auto test function (AT)

Snap-in panel



Pictogram Insert



DA 31



DA 33



DA 41



DA 43

Ordering Guide

Article No	Model No	Lamp	Wattage	Type	Face plate	Duration	Test	Battery
84.22.03.312	PESA03V1/1H/AT-U	LED	3 W	Maintained&ACEM	Universal	1 hour	Auto test	Ni-Cd 3.6V, 600mAh
84.22.03.332	PESA03V1/3H/AT-U	LED	3 W	Maintained&ACEM	Universal	3 hour	Auto test	Ni-Cd 3.6V, 1000mAh